

CLEMCO®



ABRASIVE BLAST MACHINES
CONTRACTOR SERIES
PRODUCTIVITY, SAFETY AND VERSATILITY





2 cuft

4 cuft

6 cuft



CLEMCO
The Performance
System

TECHNICAL DATA SHEET

Note: For safe, efficient blasting, read and follow the owner's manual and seek training for everyone who will use this equipment.

Purpose

High-performance blast cleaning system removes corrosion, mill scale, and coatings from most surfaces. Produces a uniform surface texture, and creates a surface profile to increase bonding for coatings. See related literature for additional applications. Machine holds 2 cubic feet of abrasive for up to 30 minutes of continuous blasting at 100 psi with standard No. 4 nozzle (1/4-inch orifice).

Requirements for Operation

These items are required but not included with this equipment.

- Clean, dry, compressed air of sufficient volume to maintain desired pressure at the nozzle. See Air Consumption Chart in Blast Off 2 booklet.
- Maximum working pressure 150 psi
- Minimum pressure 30 psi needed to operate OSHA-required remote control valves
- NIOSH-approved supplied-air respirator
- Grade D breathing-air supply as defined by the Compressed Gas Association Commodity Specification: G-7.1 (www.cganet.com)
- Abrasive blast media - consult abrasive supplier for appropriate media for your application
- Blast suit and work boots

Description of Operation

The operator controls blasting from a remote control handle at the nozzle. Pressing the handle starts blasting, releasing it stops blasting. The blast machine contains abrasive and meters it into the compressed air stream.

Description

Field portable, high-production, single-chamber blast machine, rated at 150 psi, (for one operator). Holds 2 cubic feet of blast media. Equipped with Millennium pneumatic remote controls and Quantum manual metering valve.

2 Cu Ft Contractor Blast Machine

Stock No. 21490



Advantages

- Rated for 150-psi maximum working pressure
- 1 1/2-inch Millennium valve provides unrestricted air flow
- Quantum metering valve maintains smooth, consistent flow, adjustment knob allows precise control of media flow
- 29-inch width fits through standard doorways
- Two-wheel integral cart for ease of moving
- Robust handles act as skid for loading machine into pickup or trailer and protect valves and piping from damage.
- Central hookup point for blast hose and remote controls
- Weather-resistant storage area holds manuals, paperwork and small parts

Approvals and Certifications

Blast machine pressure vessel built to American Society of Mechanical Engineers (ASME) code for 150-psi working pressure. Vessel is hydrostatically tested and National Board certified.

Remote control system complies with OSHA regulation 1910.244 (b).

Related Clemco Literature

Description	Stock No.
Contractor Series Catalog	21385
Abrasive Blasting Safety Practices	22090
Blast Off 2	09294
Contractor Blast Machine Owner's Manual	21939


Options & Accessories

Description	Stock No.
Blast machine cover, 16"	02335
Blast machine screen, 16"	03099
Supa blast hose, 1" x 50 ft, coupled w/NHP-1 & CQPS-1 ...	23480
TMP-4 nozzle.....	23520
1" air filter/moisture separator w/manual drain	22424
Blast hose safety cable	15013
Apollo 600 HP DLX respirator, Clem-Cool air conditioner, and 50 ft x 3/8" respirator hose.....	25208
CPF-20 air filter w/pressure regulator & gauge	03578
Carbon monoxide alarm, CMS-3 pkg	24612
Heavy cotton/leather blast suit S (08920), M (08921), L (08922), XL (08923), 2XL (24201), 3XL (24202)	

Item Description	Stock No.
Seasonal cotton/nylon blast suit S (22913), M (22914), L (22915), XL (22916), 2XL (22917), 3XL (25022), 4XL (24689)	
Leather gloves	02243

Included with Stock No. 21490

Item Description	Stock No.
1. 2 cu ft contractor blast machine.....	21490
2. 1 1/2" Millennium valve.....	21336
3. Quantum abrasive metering valve	22845
4. Abrasive trap	02011
(-) RLX pneumatic handle	10565
(-) 50 ft twinline hose	01951

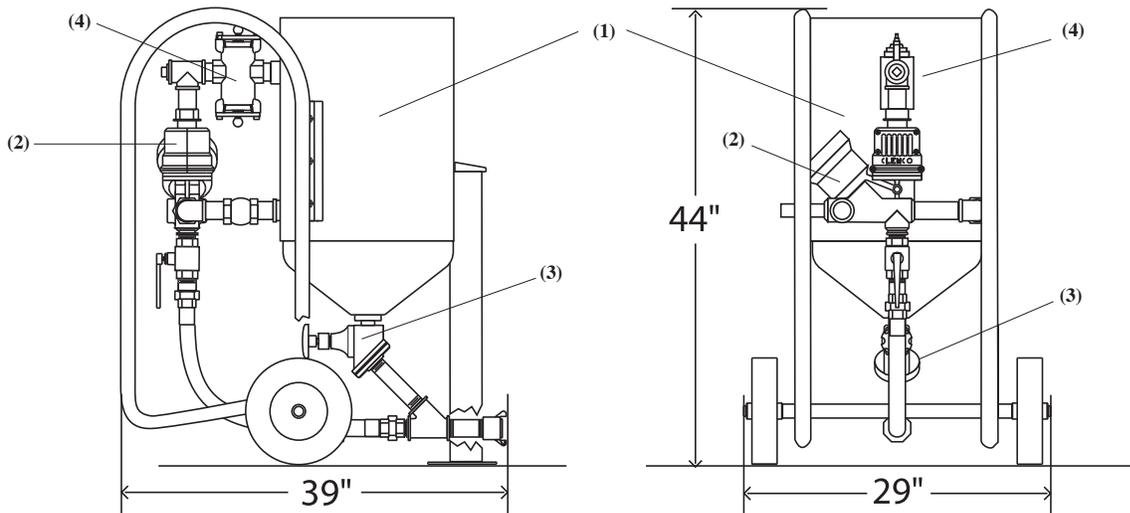

Nominal Dimensions	Unit	Shipping (including skid)
Height (floor to highest point):	44"	49"
Width (outside hub to hub):	29"	35"
Length (hose cplg. to handle):	39"	40"
Machine diameter:	16"	
Net weight:	258 lb	
Shipping Volume:		39.7 cu ft
Shipping Weight:		326 lb

Packaging

Secured on skid and shrink wrapped

Authorized Distributor:

ISO 9001 certified. Clemco is committed to continuous product improvement. Specifications are subject to change without notice.

© 2014 Clemco Industries Corp. • One Cable Car Drive • Washington, MO 63090 • Phone (636) 239-4300 • Fax (800) 726-7559



CLEMCO
The Performance
System

TECHNICAL DATA SHEET

Note: For safe, efficient blasting, read and follow the owner's manual and seek training for everyone who will use this equipment.

Purpose

High-performance blast cleaning system removes corrosion, mill scale, and coatings from most surfaces. Produces a uniform surface texture, and creates a surface profile to increase bonding for coatings. See related literature for additional applications. Machine holds 2 cubic feet of abrasive for up to 30 minutes of continuous blasting at 100 psi with standard No. 4 nozzle (1/4-inch orifice).

Requirements for Operation

These items are required but not included with this equipment.

- Clean, dry, compressed air of sufficient volume to maintain desired pressure at the nozzle. See Air Consumption Chart in Blast Off 2 booklet.
- Minimum 30 psi needed to operate OSHA-required remote control valves
- NIOSH-approved supplied-air respirator
- Blast suit and work boots
- Abrasive blast media - consult abrasive supplier for appropriate media for your application
- Grade D breathing-air supply as defined by the Compressed Gas Association Commodity Specification: G-7.1 (www.cganet.com)

Description of Operation

The operator controls blasting from a remote control handle at the nozzle. Pressing the handle starts blasting, releasing it stops blasting. The blast machine contains abrasive and meters it into the compressed air stream.

Description

Field portable, high-production, single-chamber blast machine, rated at 150 psi, (for one operator). Holds 2 cubic feet of blast media. Equipped with Millennium pneumatic remote controls, Quantum manual metering valve, and CPF air filter.

2 Cu Ft Contractor Blast Machine with CPF Filter

Stock No. 21544



Advantages

- Rated for 150-psi maximum working pressure
- 1 1/2-inch Millennium valve provides unrestricted air flow
- Quantum metering valve maintains smooth, consistent flow; adjustment knob allows precise control of media flow
- 29-inch width fits through standard doorways
- CPF-20 breathing air filter, installed on models 21544 and 21547
- Two-wheel integral cart for ease of moving
- Robust handles act as skid for loading machine into pickup or trailer and to protect valves and piping from damage
- Central hookup point for blast hose and remote controls
- High-efficiency moisture separator helps keep abrasive dry
- Weather-resistant storage area holds manuals, paperwork and small parts

Approvals and Certifications

Blast machine pressure vessel built to American Society of Mechanical Engineers (ASME) code for 150-psi working pressure. Vessel is hydrostatically tested and National Board certified.

Remote control system complies with OSHA regulation 1910.244 (b).

Related Clemco Literature

Description	Stock No.
Contractor Series Catalog	21385
Abrasive Blasting Safety Practices	22090
Blast Off 2	09294
Contractor Blast Machine Owner's Manual	21939
CPF filter Owner's Manual	04143


Options & Accessories

Description	Stock No.
Blast machine cover, 16"	02335
Blast machine screen, 16"	03099
Supa blast hose, 1" x 50 ft, coupled w/NHP-1 & CQPS-1 ...	23480
TMP-4 nozzle.....	23520
1" air filter/moisture separator w/manual drain	22424
Blast hose safety cable	15013
Apollo 600 HP DLX respirator, Clem-Cool air conditioner, and 50 ft x 3/8" respirator hose	25208
Carbon monoxide alarm, CMS-3 pkg	24612
Heavy cotton/leather blast suit S (08920), M (08921), L (08922), XL (08923) 2XL (24201), 3XL (24202)	

Seasonal cotton/nylon blast suit
S (22913), M (22914), L (22915), XL (22916), 2XL (22917),
3XL (25022), 4XL (24689)
Leather gloves02243

Included with Stock No. 21544

Item	Description	Stock No.
1.	2 cu ft contractor blast machine.....	21490
2.	1 1/2" Millennium valve.....	21336
3.	Quantum abrasive metering valve	22845
4.	CPF-20 air filter w/pressure regulator & gauge	03578
5.	Abrasive trap	02011
(-)	RLX pneumatic handle	10565
(-)	50 ft twinline hose	01951

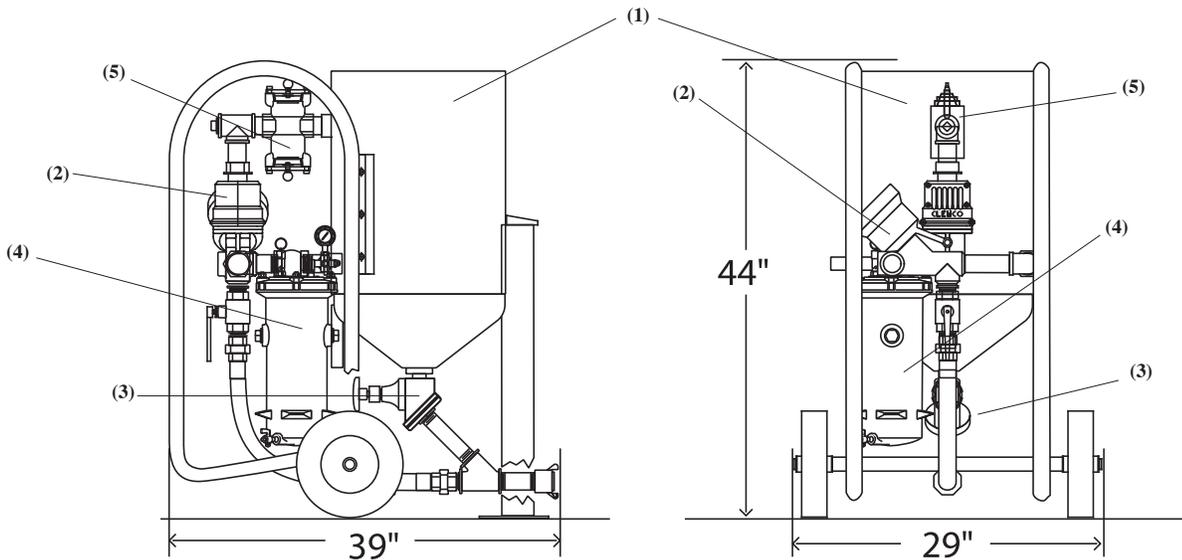

Nominal Dimensions	Unit	Shipping (including skid)
Height (floor to highest point):	44"	49"
Width (outside hub to hub):	29"	35"
Length (hose cplg. to handle):	39"	40"
Machine diameter:	16"	
Net weight:	258 lb	
Shipping Volume:		39.7 cu ft
Shipping Weight:	326 lb	342 lb

Packaging

Secured on skid and shrink wrapped

Authorized Distributor:

ISO 9001 certified. Clemco is committed to continuous product improvement. Specifications are subject to change without notice.



CLEMCO
The Performance System

TECHNICAL DATA SHEET

Note: For safe, efficient blasting, read and follow the owner's manual and seek training for everyone who will use this equipment.

Purpose

High-performance blast cleaning system removes corrosion, mill scale, and coatings from most surfaces. Produces a uniform surface texture, and creates a surface profile to increase bonding for coatings. See related literature for additional applications. Machine holds 4 cubic feet of abrasive for up to 30 minutes of continuous blasting at 100 psi with standard No. 5 nozzle ($\frac{5}{16}$ -inch orifice).

Requirements for Operation

These items are required but not included with this equipment.

- Clean, dry, compressed air of sufficient volume to maintain desired pressure at the nozzle. See Air Consumption Chart in Blast Off 2 booklet.
- Maximum working pressure 150 psi
- Minimum pressure 30 psi needed to operate OSHA-required remote control valves
- NIOSH-approved supplied-air respirator
- Grade D breathing-air supply as defined by the Compressed Gas Association Commodity Specification: G-7.1 (www.cganet.com)
- Blast suit and work boots
- Abrasive blast media - consult abrasive supplier for appropriate media for your application

Description of Operation

The operator controls blasting from a remote control handle at the nozzle. Pressing the handle starts blasting, releasing it stops blasting. The blast machine contains abrasive and meters it into the compressed air stream.

Description

Field portable, high-production, single chamber blast machine, rated at 150 psi, (for one operator). Holds 4 cubic feet of blast media. Equipped with Millennium pneumatic remote controls, and Quantum manual metering valve.

4 Cu Ft Contractor Blast Machine

Stock No. 21505



Advantages

- Rated for 150-psi working pressure
- $1\frac{1}{2}$ -inch Millennium valve provides unrestricted air flow
- Quantum metering valve maintains smooth, consistent flow; adjustment knob allows precise control of media flow
- $1\frac{1}{4}$ -inch piping allows up to 50 percent increase in air flow; when compared to 1-inch piping
- 29-inch width fits through standard doorways
- Four-wheel integral cart for ease of moving
- Robust handles act as skid for loading machine into pickup or trailer and protect valves and piping from damage

- Central hookup point for blast hose and remote controls
- Weather-resistant storage area holds manuals, paperwork and small parts

Approvals and Certifications

Blast machine pressure vessel built to American Society of Mechanical Engineers (ASME) code for 150-psi working pressure. Vessel is hydrostatically tested and National Board certified.

Remote control system complies with OSHA regulation 1910.244 (b).

Related Clemco Literature

Description	Stock No.
Contractor Series Catalog	21385
Abrasive Blasting Safety Practices	22090
Blast Off 2	09294
Contractor Blast Machine Owner's Manual	21941


Options & Accessories

Description	Stock No.
Blast machine cover, 20"	20358
Blast machine screen, 20"	20357
Supa blast hose, 1" x 50 ft, coupled with nozzle holder, NHP-1 and coupling, CQPS-1	23480
TMP-5 nozzle	23521
1 1/2" air filter/moisture separator w/manual drain	22363
CPF-20 air filter w/pressure regulator & gauge	03578
Blast hose safety cable	15013
Apollo 600 HP DLX respirator with Clem-Cool air conditioner and 50 ft x 3/8" respirator hose	25208
Carbon monoxide alarm, CMS-3 pkg	24612

Heavy cotton/leather blast suit S (08920), M (08921), L (08922), XL (08923), 2XL (24201), 3XL (24202)	
Seasonal cotton/nylon blast suit S (22913), M (22914), L (22915), XL (22916), 2XL (22917), 3XL (25022), 4XL (24689)	
Leather gloves	02243

Included with Stock No. 21505

Item	Description	Stock No.
1.	4 cu ft contractor blast machine	21505
2.	1 1/2" Millennium valve	21336
3.	Quantum abrasive metering valve	22845
4.	Abrasive trap	02011
(-)	RLX pneumatic handle	10565
(-)	50 ft twinline hose	01951

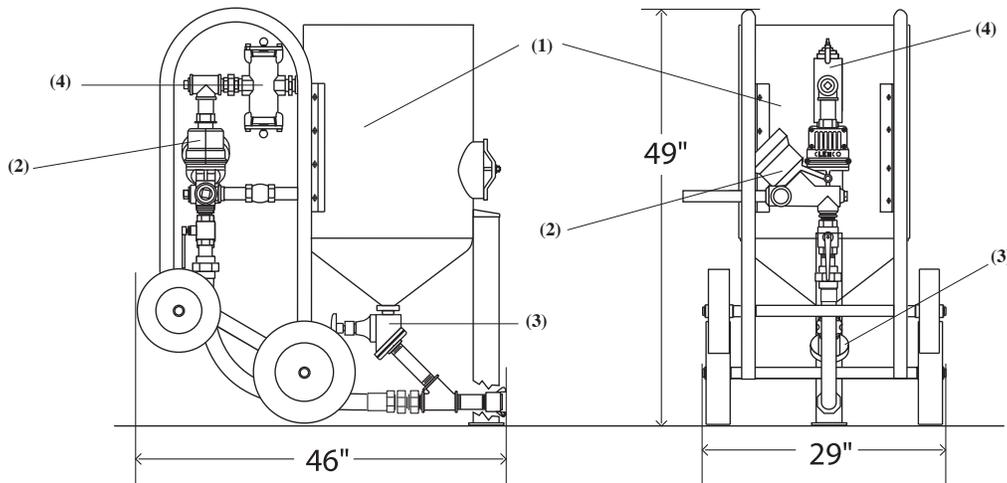


Nominal Dimensions	Unit	Shipping (including skid)
Height (floor to highest point):	49"	54"
Width (outside hub to hub):	29"	35"
Length (hose cplg. to handle):	46"	48"
Machine diameter:	20"	
Net weight:	382 lb	
Shipping Volume:		52.5 cu ft
Shipping Weight:		454 lb

Packaging

Secured on skid and shrink wrapped

Authorized Distributor:

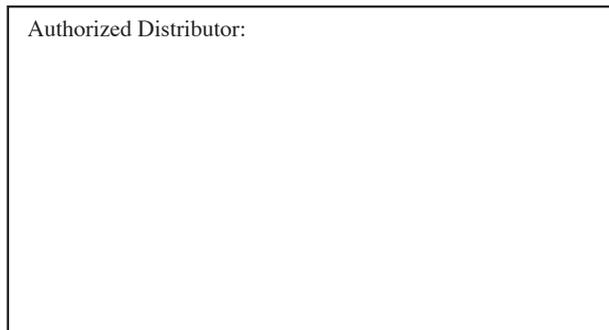

ISO 9001 certified. Clemco is committed to continuous product improvement. Specifications are subject to change without notice.

© 2014 Clemco Industries Corp. • One Cable Car Drive • Washington, MO 63090 • Phone (636) 239-4300 • Fax (800) 726-7559

Stock No. 21953

info@clemcoindustries.com • www.clemcoindustries.com

1195 Rev. D 09/14



CLEMCO
The Performance System

TECHNICAL DATA SHEET

Note: For safe, efficient blasting, read and follow the owner's manual and seek training for everyone who will use this equipment.

Purpose

High-performance blast cleaning system removes corrosion, mill scale, and coatings from most surfaces. Produces a uniform surface texture, and creates a surface profile to increase bonding for coatings. See related literature for additional applications. Machine holds 4 cubic feet of abrasive for up to 30 minutes of continuous blasting at 100 psi with standard No. 5 nozzle ($\frac{5}{16}$ -inch orifice).

Requirements for Operation

These items are required but not included with this equipment.

- Clean, dry, compressed air of sufficient volume to maintain desired pressure at the nozzle. See Air Consumption Chart in Blast Off 2 booklet.
- Maximum working pressure 150 psi
- Minimum pressure 30 psi needed to operate OSHA-required remote control valves
- NIOSH-approved supplied-air respirator
- Grade D breathing-air supply as defined by the Compressed Gas Association Commodity Specification: G-7.1 (www.cganet.com)
- Blast suit and work boots
- Abrasive blast media - consult abrasive supplier for appropriate media for your application

Description of Operation


The operator controls blasting from a remote control handle at the nozzle. Pressing the handle starts blasting, releasing it stops blasting. The blast machine contains abrasive and meters it into the compressed air stream.

Description

Field portable, high-production, single chamber blast machine, rated at 150 psi, (for one operator). Holds 4 cubic feet of blast media. Equipped with Millennium pneumatic remote controls, Quantum manual metering valve, and CPF-20 air filter.

4 Cu Ft Contractor Blast Machine with CPF Filter

Stock No. 21545

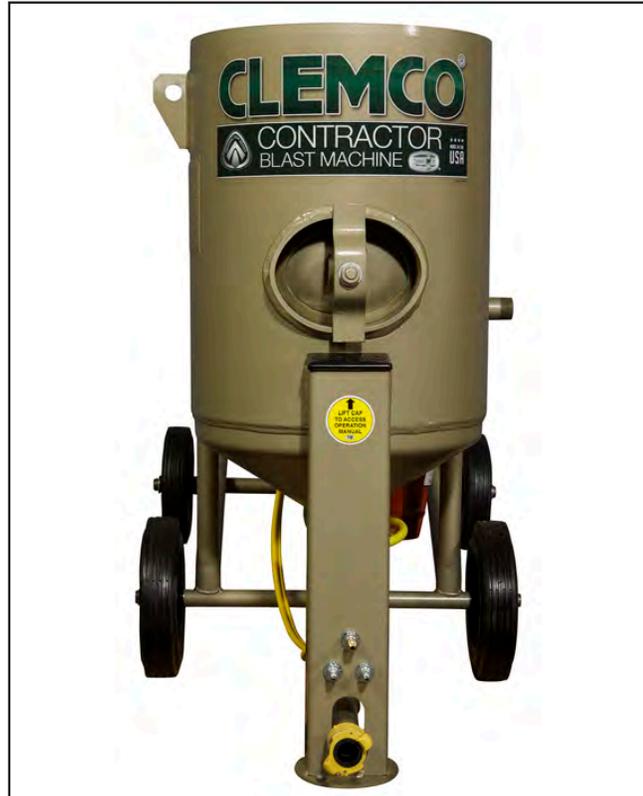

Advantages

- Rated for 150-psi working pressure
- 1 $\frac{1}{2}$ -inch Millennium valve provides unrestricted air flow
- Quantum metering valve maintains smooth, consistent flow; adjustment knob allows precise control of media flow
- 1 $\frac{1}{4}$ -inch piping allows up to 50 percent increase in air flow, when compared to 1-inch piping and hose
- 29-inch width fits through standard doorways
- CPF-20 breathing air filter, installed
- Four-wheel integral cart for ease of moving
- Robust handles act as skid for loading machine into pickup or trailer and protect valves and piping from damage
- Central hookup point for blast hose and remote controls

- Weather-resistant storage area holds manuals, paperwork and small parts

Approvals and Certifications

Blast machine pressure vessel built to American Society of Mechanical Engineers (ASME) code for 150-psi working pressure. Vessel is hydrostatically tested and National Board certified.

Remote control system complies with OSHA regulation 1910.244 (b).

Related Clemco Literature

Description	Stock No.
Contractor Series Catalog	21385
Abrasive Blasting Safety Practices	22090
Blast Off 2	09294
Contractor Blast Machine Owner's Manual	21941
CPF Filter Owner's Manual	04143


Options & Accessories

Description	Stock No.
Blast machine cover, 20"	20358
Blast machine screen, 20"	20357
Supa blast hose, 1" x 50 ft, coupled with nozzle holder, NHP-1 and coupling, CQPS-1	23480
TMP-5 nozzle	23521
1 1/2" air filter/moisture separator w/manual drain	22363
Blast hose safety cable	15013
Apollo 600 HP DLX respirator with Clem-Cool air conditioner and 50 ft x 3/8" of respirator hose	25208
Carbon monoxide alarm, CMS-3 pkg	24612

Heavy cotton/leather blast suit S (08920), M (08921), L (08922), XL (08923), 2XL (24201), 3XL (24202)	
Seasonal cotton/nylon blast suit S (08920), M (22914), L (22915), XL (22916), 2XL (22917), 3XL (25022), 4XL (24689)	
Leather gloves	02243

Included with Stock No. 21545

Item	Description	Stock No.
1.	4 cu ft contractor blast machine	21505
2.	1 1/2" Millennium valve	21336
3.	Quantum abrasive metering valve	22845
4.	CPF-20 air filter w/ pressure regulator & gauge	03578
5.	Abrasive trap	02011
(-)	RLX pneumatic handle	10565
(-)	50 ft twinline hose	01951

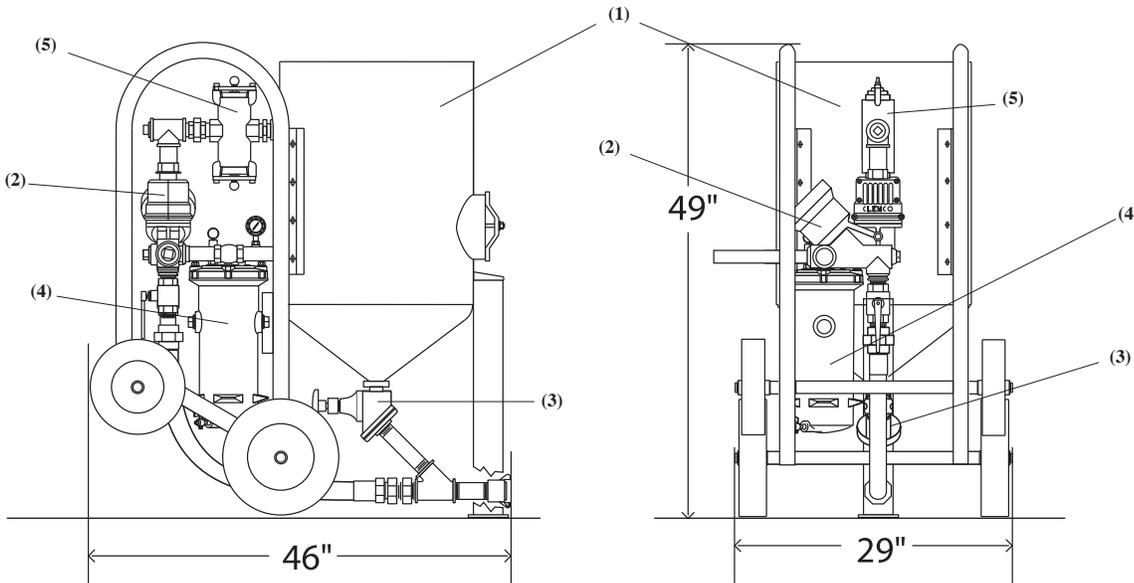

Nominal Dimensions	Unit	Shipping (including skid)
Height (floor to highest point):	49"	54"
Width (outside hub to hub):	29"	35"
Length (hose cplg. to wheel):	50"	52"
Machine diameter:	20"	
Net weight:	401 lb	
Shipping Volume:		52.5 cu ft
Shipping Weight:		473 lb

Packaging

Secured on skid and shrink wrapped

Authorized Distributor:

ISO 9001 certified. Clemco is committed to continuous product improvement. Specifications are subject to change without notice.



CLEMCO
The Performance System

TECHNICAL DATA SHEET

Note: For safe, efficient blasting, read and follow the owner's manual and seek training for everyone who will use this equipment.

Purpose

High-performance blast cleaning system removes corrosion, mill scale, and coatings from most surfaces. Produces a uniform surface texture, and creates a surface profile to increase bonding for coatings. See related literature for additional applications. Machine holds 6 cubic feet of abrasive for up to 30 minutes of continuous blasting at 100 psi with standard No. 6 nozzle ($\frac{3}{8}$ -inch orifice).

Requirements for Operation

- Clean, dry, compressed air of sufficient volume to maintain desired pressure at the nozzle. See Air Consumption Chart in Blast Off 2 booklet.
- Maximum working pressure 150 psi
- Minimum pressure 30 psi needed to operate OSHA-required remote control valves
- NIOSH-approved supplied-air respirator
- Grade D breathing-air supply as defined by the Compressed Gas Association Commodity Specification: G-7.1 (www.cganet.com)
- Abrasive blast media - consult abrasive supplier for appropriate media for your application

Description of Operation

The operator controls blasting from a remote control handle at the nozzle. Pressing the handle starts blasting, releasing it stops blasting. The blast machine contains abrasive and meters it into the compressed air stream.

Description

Field portable, high-production, single chamber blast machine, rated at 150 psi, (for one operator). Holds 6 cubic feet of blast media. Equipped with Millennium pneumatic remote controls and Quantum manual metering valve.

6 Cu Ft Contractor Blast Machine

Stock No. 21610



Advantages

- Rated for 150-psi maximum working pressure
- 1 $\frac{1}{2}$ -inch Millennium valve provides unrestricted air flow
- Quantum metering valve maintains smooth, consistent flow, adjustment knob allows precise control of media flow
- 1 $\frac{1}{4}$ -inch piping allows up to 50 percent increase in air flow, when compared to standard 1-inch piping
- 29-inch width fits through standard doorways
- Four-wheel integral cart for ease of moving
- Robust handles act as skid for loading machine into pickup or trailer and protect valves and piping from damage
- Central hookup point for blast hose and remote controls

- Weather-resistant storage area holds manuals, paperwork and small parts

Approvals and Certifications

Blast machine pressure vessel built to American Society of Mechanical Engineers (ASME) code for 150-psi working pressure. Vessel is hydrostatically tested and National Board certified.

Remote control system complies with OSHA regulation 1910.244 (b).

Related Clemco Literature

Description	Stock No.
Contractor Series Catalog	21385
Abrasive Blasting Safety Practices	22090
Blast Off 2	09294
Contractor Blast Machine Owner's Manual	21941


Options & Accessories

Description	Stock No.
Blast machine cover, 24"	02336
Blast machine screen, 24"	03100
Supa blast hose, 1 1/4" x 50 ft, coupled with nozzle holder, NHP-2 and coupling, CQPS-2.....	23481
TXP-6 nozzle	23525
1 1/2" air filter/moisture separator w/manual drain	22363
1 1/2" Moisture separator w/manual drain.....	22363
CPF-20 air filter w/pressure regulator & gauge.....	03578
Blast hose safety cable	15013
Apollo 600 HP DLX respirator with Clem-Cool air conditioner and 50 ft x 3/8" of respirator hose	25208
Carbon monoxide alarm, CMS-3 pkg.....	24612

Heavy cotton/leather blast suit
S (08920), M (08921), L (08922), XL (08923), 2XL (24201),
3XL (24202)
Seasonal cotton/nylon blast suit
S (22913), M (22914), L (22915), XL (22916), 2XL (22917),
3XL (25022), 4XL (24689)
Leather gloves.....02243

Included with Stock No. 21610

Item	Description	Stock No.
1.	6 cu ft contractor blast machine.....	21610
2.	1 1/2" Millennium valve.....	21336
3.	Quantum abrasive metering valve	22845
4.	Abrasive trap	02011
(-)	RLX pneumatic handle.....	10565
(-)	50 ft twinline hose	01951

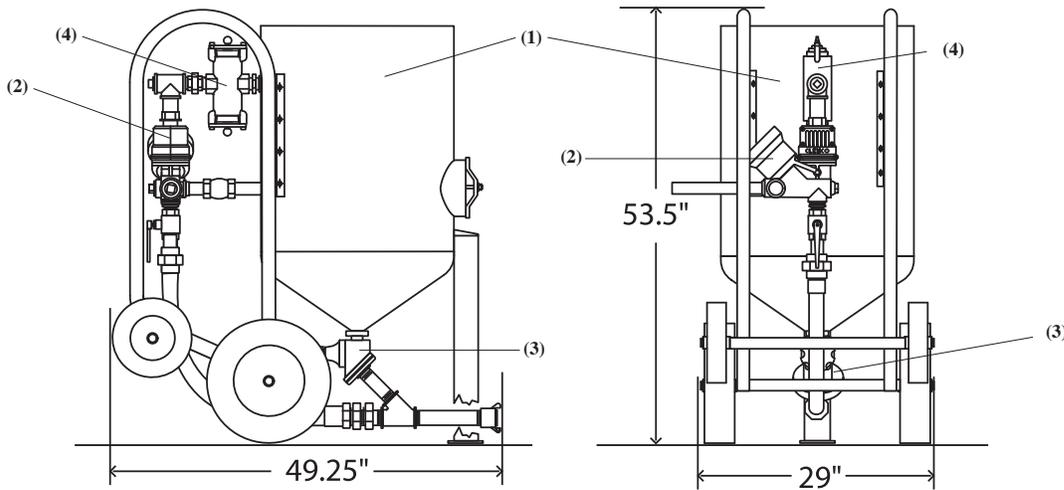

Nominal Dimensions	Unit	Shipping (including skid)
Height (floor to highest point):	53.5"	59"
Width (outside hub to hub):	29"	35"
Length (hose cplg. to wheel):	49.25"	52"
Machine diameter:	24"	
Net weight:	514 lb	
Shipping Volume:		62.1 cu ft
Shipping Weight:		588 lb

Authorized Distributor:

Packaging

Secured on skid and shrink wrapped

ISO 9001 certified. Clemco is committed to continuous product improvement. Specifications are subject to change without notice.

© 2014 Clemco Industries Corp. • One Cable Car Drive • Washington, MO 63090 • Phone (636) 239-4300 • Fax (800) 726-7599

Stock No. 21954

info@clemcoindustries.com • www.clemcoindustries.com

1195 Rev. D 09/14



CLEMCO
The Performance System

TECHNICAL DATA SHEET

Note: For safe, efficient blasting, read and follow the owner's manual and seek training for everyone who will use this equipment.

Purpose

High-performance blast cleaning system removes corrosion, mill scale, and coatings from most surfaces. Produces a uniform surface texture, and creates a surface profile to increase bonding for coatings. See related literature for additional applications. Machine holds 6 cubic feet of abrasive for up to 30 minutes of continuous blasting at 100 psi with standard No. 6 nozzle ($\frac{3}{8}$ -inch orifice).

Requirements for Operation

These items are required but not included with this equipment.

- Clean, dry, compressed air of sufficient volume to maintain desired pressure at the nozzle. See Air Consumption Chart in Blast Off 2 booklet.
- Maximum working pressure 150 psi
- Minimum pressure 30 psi needed to operate OSHA-required remote control valves
- NIOSH-approved supplied-air respirator
- Grade D breathing-air supply as defined by the Compressed Gas Association Commodity Specification: G-7.1 (www.cganet.com)
- Blast suit and work boots
- Abrasive blast media - consult abrasive supplier for appropriate media for your application

Description of Operation

The operator controls blasting from a remote control handle at the nozzle. Pressing the handle starts blasting, releasing it stops blasting. The blast machine contains abrasive and meters it into the compressed air stream.

Description

Field portable, high-production, single chamber blast machine, rated at 150 psi, (for one operator). Holds 6 cubic feet of blast media. Equipped with Millennium pneumatic remote controls, Quantum manual metering valve, and CPF-20 air filter.

6 Cu Ft Contractor Blast Machine with CPF Filter

Stock No. 21546



Advantages

- Rated for 150-psi maximum working pressure
- $1\frac{1}{2}$ -inch Millennium valve provides unrestricted air flow
- Quantum metering valve maintains smooth, consistent flow, adjustment knob allows precise control of media flow
- $1\frac{1}{4}$ -inch piping allows up to 50 percent increase in air flow, when compared to standard 1-inch piping
- 29-inch width fits through standard doorways
- CPF-20 breathing air filter, installed
- Four-wheel integral cart for ease of moving
- Robust handles act as skid for loading machine into pickup or trailer and protect valves and piping from damage
- Central hookup point for blast hose and remote controls
- Weather-resistant storage area holds manuals, paperwork and small parts

Approvals and Certifications

Blast machine pressure vessel built to American Society of Mechanical Engineers (ASME) code for 150-psi working pressure. Vessel is hydrostatically tested and National Board certified.

Remote control system complies with OSHA regulation 1910.244 (b).

Related Clemco Literature

Description	Stock No.
Contractor Series Catalog	21385
Abrasive Blasting Safety Practices	22090
Blast Off 2	09294
Contractor Blast Machine Owner's Manual	21941
CPF Filter Owner's Manual	04143


Options & Accessories

Description	Stock No.
Blast machine cover, 24"	02336
Blast machine screen, 24"	03100
Supa blast hose, 1 1/4" x 50 ft, coupled with nozzle holder, NHP-2 and coupling, CQPS-2.....	23481
TXP-6 nozzle	23525
1 1/2" air filter/moisture separator w/manual drain	22363
Blast hose safety cable	15013
Apollo 600 HP DLX respirator with Clem-Cool air conditioner and 50 ft x 3/8" of respirator hose	25208
Carbon monoxide alarm, CMS-3 pkg	24612

Heavy cotton/leather blast suit
S (08920), M (08921), L (08922), XL (08923), 2XL (24201),
3XL (24202)
Seasonal cotton/nylon blast suit
S (22913), M (22914), L (22915), XL (22916), 2XL (22917),
3XL (25022), 4XL (24689)
Leather gloves02243


Included with Stock No. 21546

Item	Description	Stock No.
1.	6 cu ft contractor blast machine.....	21610
2.	1 1/2" Millennium valve	21336
3.	Quantum abrasive metering valve	22845
4.	CPF-20 air filter w/ pressure regulator & gauge	03578
5.	Abrasive trap	02011
(-)	RLX pneumatic handle	10565
(-)	50 ft twinline hose	01951

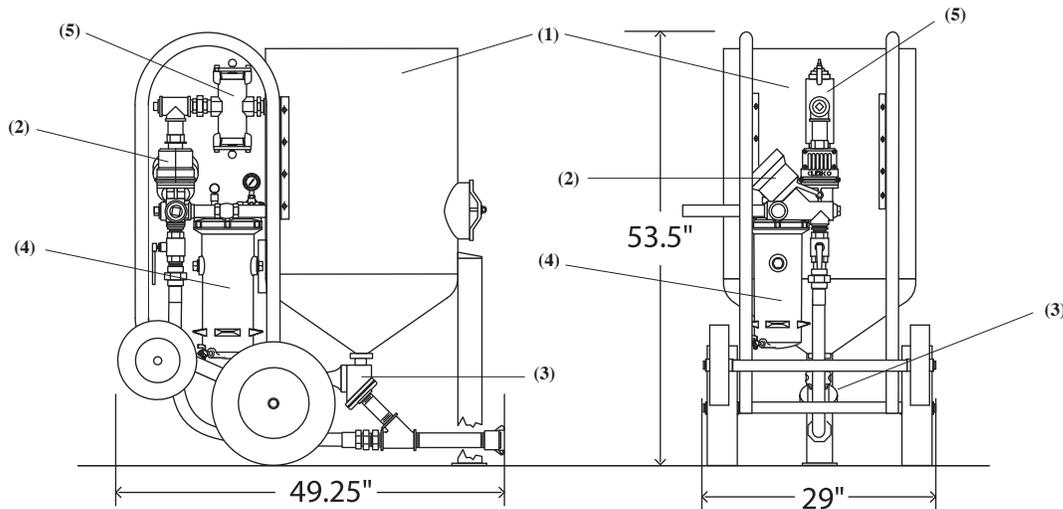

Nominal Dimensions	Unit	Shipping (including skid)
Height (floor to highest point):	53.5"	59"
Width (outside hub to hub):	29"	35"
Length (hose cplg. to wheel):	49.25"	52"
Machine diameter:	24"	
Net weight:	532 lb	
Shipping Volume:		62.1 cu ft
Shipping Weight:		606 lb

Authorized Distributor:

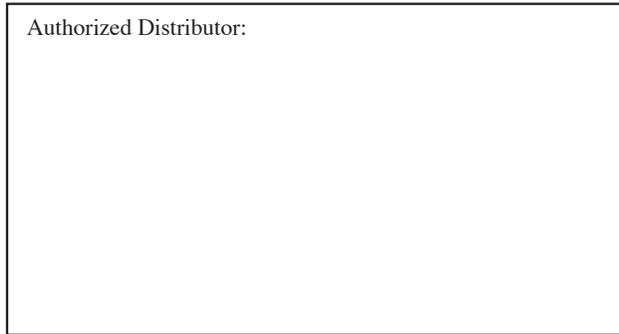

Packaging

Secured on skid and shrink wrapped

ISO 9001 certified. Clemco is committed to continuous product improvement. Specifications are subject to change without notice.